

Spring-Flo®

Faucet Aerator - 2.2 gpm Flow Restricted Regular Size



flow, stop and go®

Features and Benefits

- Three screen slotted aerator.
- Creates a smooth stream of water, fully aerated with a unique air intake through side slots.
- Maximizes aeration and reduces splash.
- Disassembles for easy and repeated cleaning.
- Available finish: chrome.
- Roll marked housings with statutory marks.

Certifications

ANSI/ NSF® -61-372
ASME A112.18.1M and CSA B125 (15 020 pending)



Thread & Part Number

Part #	Designation	Thread Size
TSP-220MST-N	Regular male with tightening grooves	15/16"-27
TSP-220FST-N	Regular female	55/64"-27
TSP-220DTST-N	Regular dual thread	15/16"-27 x 55/64"-27

Packaging:

Reg. male/female/dual thread 1 pc (bag), 6 pcs (tube), 50 pcs (tray)

Flow Rate Curve

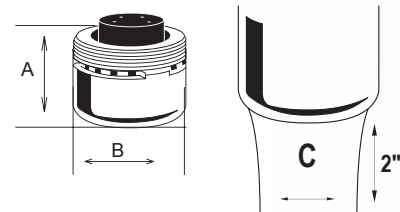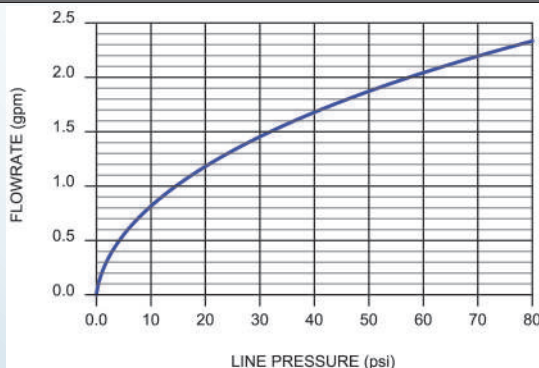

Dimensions

No	mm	In
Regular Male		
A	14.40	.567
B	23.50	.925
C	≈ 13	≈ 1/2
Regular Female & Dual Thread		
A	18.54	.730
B	23.50	.925
C	≈ 13	≈ 1/2

Housings



Technical Data

Materials:

Body	Brass
Washer	Santoprene
Filter Screen	Brass/Stainless Steel
Mixing Chambers	Brass

Continuous

Short-term (5 minutes max.)
Per ASME A112.181 testing requirements.

