

## Faucet Attachment - 1.0 gpm max Pressure Compensating Regular Size

NEOPERL®

flow, stop and go®

### Features and Benefits

- ▶ Full size non-aerated spray (Rain Spray) with soft water stream.
- ▶ Unique silicone bottom for easy cleaning.
- ▶ Watercolours™ design: Color coding to identify flow rate and stream pattern.
- ▶ Pressure compensating for constant flow from 20 to 80 psi.
- ▶ Anti-clogging dome screen filters sediment and particles.
- ▶ Compatible with regular and vandal proof M22 & M24 metric housings.
- ▶ Available housing finishes: chrome, polished brass, brushed nickel and oil rubbed bronze.
- ▶ Laser marked housings with statutory marks.
- ▶ Adjustable bottom to angle the direction of your stream.

### Certifications

ANSI/ NSF® -61-372  
ASME A112.18.1M and CSA B125  
Meets **CALGreen** requirements  
WaterSense



### Options Available

Part #	Designation	Thread Size
TSSR-100INST-PD	Insert only	
TSSR-100MST-PD	Regular male	15/16"-27
TSSR-100FST-PD	Regular female	55/64"-27
TSSR-100DTST-PD	Regular dual thread	55/16"-27 x 55/64"-27
TSSR-100MSTVP-PD	Vandal proof regular male	15/16"-27
TSSR-100FSTVP-PD	Vandal proof regular female	55/64"-27

Other product combinations available.



### Packaging:

Inserts 1 pc (bag), 6 pcs (bag), 50 pcs (bag)  
Reg. male/female/dual thread 1 pc (bag), 6 pcs (tube), 50 pcs (tray)  
Reg. vandal proof male/female/dual thread 1 pc (bag), 6 pcs (tube), 40 pcs (tray)

### Color Code

Dome	Flow Regulator	Basket
Natural	Blue	Dark Gray

### Flow Rate Curve

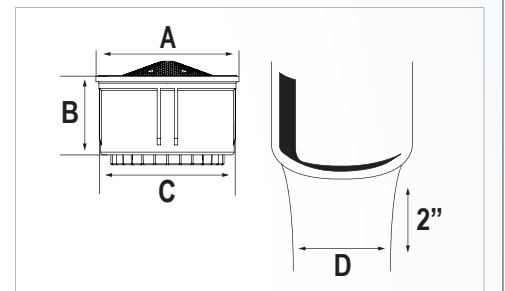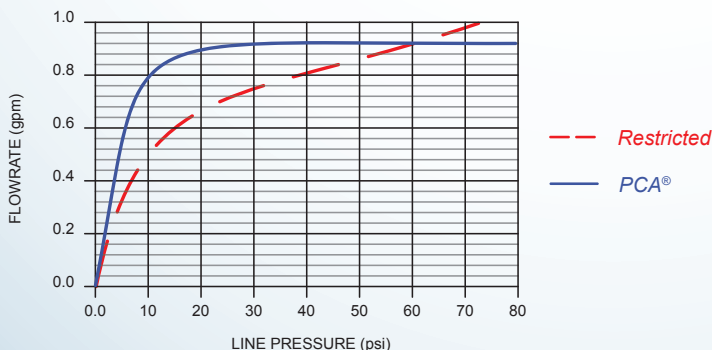

### Dimensions

No	mm	In
A	20.85	.821
B	11.45	.451
C	19.97	.786
D	≈ 32	≈ 1 1/4


### Housings



### Technical Data

Materials: Body Acetal  
Spray tips Silicone  
O-ring EPDM  
Washer EPDM

### Continuous



### Short-term (5 minutes max.) Per ASME A112.18.1 testing requirements.

