

PCA[®] Spray

Faucet Attachment - 0.35 gpm max Pressure Compensating Tom Thumb[®] Size



flow, stop and go[®]

Features and Benefits

- ▶ Watercolours[®] design: Color coding to identify flow rate and stream pattern.
- ▶ Provides non-splashing, non-aerated spray.
- ▶ Pressure compensating for constant flow from 20 to 80 psi.
- ▶ Anti-clogging dome screen filters sediment and particles.
- ▶ Available housing finishes: chrome.
- ▶ Roll marked housings with statutory marks.
- ▶ Delivers a flow rate of 30% below the baseline for public access bathrooms (0.5 gpm) to maximize LEED[®] points in green buildings.

Certifications

ANSI/ NSF[®] -61-372
ASME A112.18.1M and CSA B125
Meets CAUGreen requirements

Thread & Part Number

Part #	Designation	Thread Size
TSS-035INTT-P	Insert only	
TSS-035MTT-P	Tom Thumb [®] male	M18x1
TSS-035FTT-P	Tom Thumb [®] female	M16x1

Other product combinations available.




Packaging:

Inserts 1 pc (bag), 6 pcs (bag), 50 pcs (bag)
Tom Thumb[®] male/female 1 pc (bag), 50 pcs (tray)

Color Code

Dome	Flow Regulator	Basket
Clear	Brown	Dark Gray

Flow Rate Curve

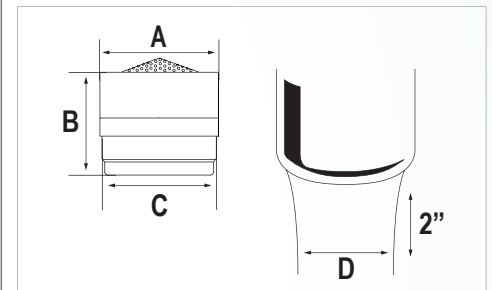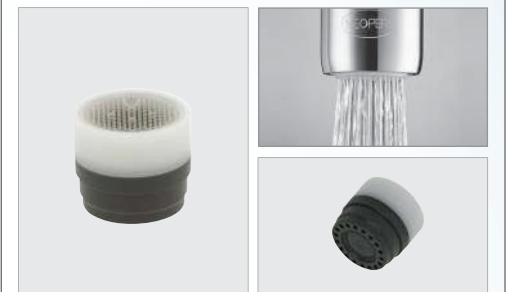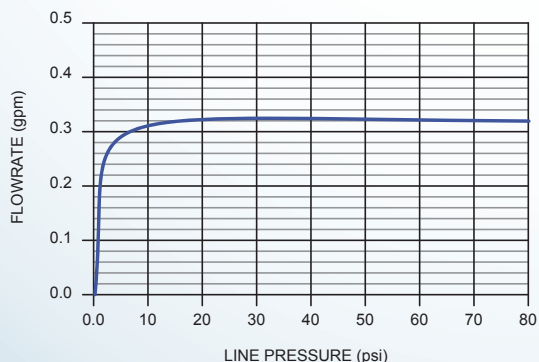

Dimensions

No	mm	In
A	15.00	.591
B	12.95	.510
C	14.05	.553
D	≈ 16	≈ 5/8

Housings



Tom Thumb[®] Male



Tom Thumb[®] Female

Technical Data

Materials: Body Acetal
O-ring EPDM
Washer NBR

Continuous

max. 60 °C
max. 140 °F

max. 90psi
max. 6.2bar

Short-term (5 minutes max.) Per ASME A112.18.1 testing requirements.

max. 70 °C
max. 160 °F

max. 125psi
max. 8.5bar